

### Description & Features:

- Robust tees for isolation ring assembly
- 316 SS construction with 1/4" or 1/2" NPTF instrument connections and a 1/2" NPTF process connection
- Ideal for installing pressure gauges with other instruments for full functionality

### Applications:

- Water treatment facilities and other slurry environments where isolation rings are installed and more than one pressure instrument is required (eg. pressure gauge with pressure switch or transmitter)


### Specifications

|                               |                         |
|-------------------------------|-------------------------|
| <b>Material</b>               | 316 SS                  |
| <b>Connections</b>            | 2 instrument, 1 process |
| <b>Instrument Connections</b> | 1/4" or 1/2" NPTF       |
| <b>Process Connection</b>     | 1/2" NPTF               |


### Order Codes

| Type | 1/4"    | 1/2"    |
|------|---------|---------|
| A    | FIR0014 | FIR0010 |
| B    | FIR0024 | FIR0020 |
| C    | FIR0034 | FIR0030 |

### Type A



### Type B

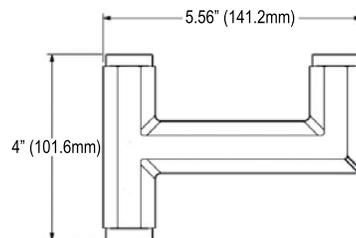

### Type C

