



Description & Features:

- 2" (50mm)
- Weather resistant black ABS plastic case
- Brass wetted parts
- $\pm 3-2-3\%$ accuracy
- ASME B40.100 compliant
- CRN registered
- 5 year warranty

Applications:

- Residential and commercial swimming pools filters/pumps


Specifications

Dial	2" (50mm) white aluminum with black markings
Case	Weather resistant black ABS plastic case
Lens	Acrylic
Socket	Brass
Connection	1/4" NPT
Bourdon Tube	Phosphor bronze
Movement	Brass
Pointer	Aluminum, black
Welding	Silver alloy
Over-pressure Limit	25% of full scale value
Working Pressure	Maximum 75% of full scale value
Ambient/Process Temperature	-40°F to 150°F (-40°C to 65°C)
Accuracy	$\pm 3-2-3\%$ ANSI/ASME Grade B
Enclosure Rating	IP52
Warning	 WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov .

Order Codes (products in bold are normally in stock)

Pressure Range	1/4" Bottom	1/4" Back
0/60 psi	PEM194	194-B

2" Bottom Connection

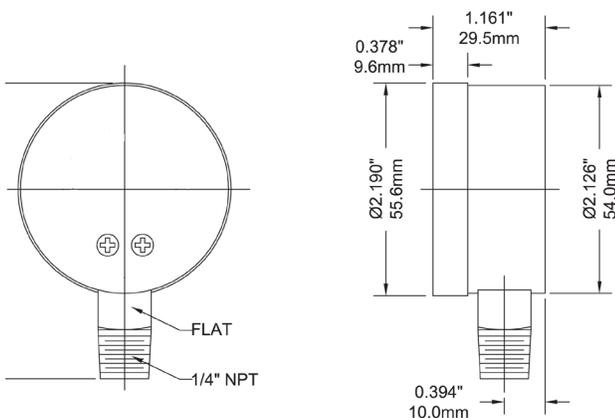

2" Back Connection

